


GES.10000



10000 LITRE STEEL BUNDED GENERATOR FEED TANK

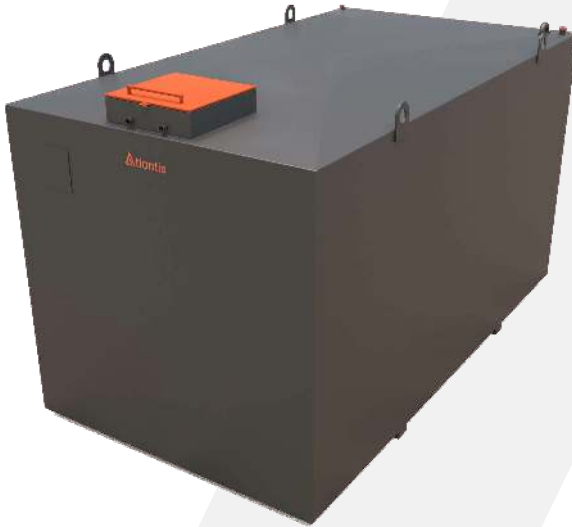

INSIDE HATCH

TANK:

The inner tank provides the required storage area, the outer tank forms the required bund with capacity for 110% of the total liquid being stored. The tank is suitable for storage of Diesel, Kerosene and certain other oils. Please check before usage.

THIS TANK COMPLIES WITH:

Oil Pollution Prevention Guidelines (England and Wales) 2002 PPG2. BS799 pt5

SPECIFICATIONS:

- Tough steel construction
- 10000 litres capacity
- 2 no 1.5" tank sockets
- 1 no 2" fill point
- 1 no 1" suction feed (removable) c/w foot valve & strainer

- 1 no 1" return socket
- Lockable lid
- Fozmula spiral float gauge
- 2" tank to bund vent
- 2" bund vent
- Mounted on full width bearers

DIMENSIONS:

Length: 3350mm

Width: 1830mm

Height: 1830mm

Weight: 1520kg

